

KeyPAC® Solo

The KeyPAC® Solo is a low cost and easy to install standalone reader / controller.

Available in three housings, the single door access control system comes with dual LEDs and a built-in sounder which can be programmed to issue a local alarm when a door is left open or forced.



Key Features:

- Up to 2,000 users
- Up to 200mm reading range
- Bi-directional reading (Standard & Universal)*
- Anti-tamper protected
- Easy to install
- Simple to use
- KeyPAC (125KHz) proximity technology
- Supplied with two master KeyPAC ID cards for programming
- Maintenance free and suitable for interior or exterior use
- Standard and Universal models are designed to fit a standard MK™ backbox
- Can be used as a secure switch allowing many types of equipment to be turned on or off eg. alarm systems
- 5 year guarantee against electronic failure
- Lifetime guarantee against electronic failure on PAC proximity cards and tokens

* For correct bi-directional operation please refer to the user guide



Typical System Configuration:

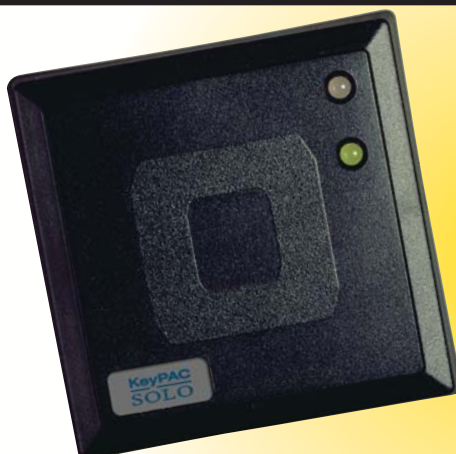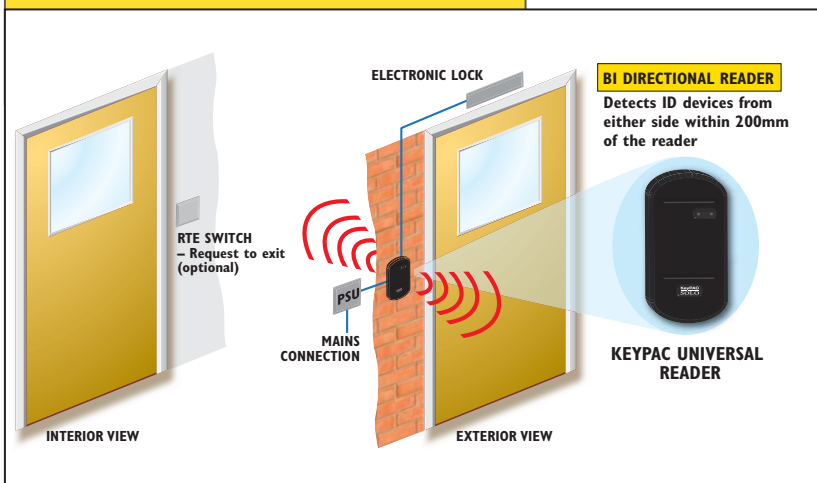


Features & Specification

Description	KeyPAC Solo Standard Black KeyPAC Solo Universal Black KeyPAC Solo Vandal Resistant
ID Technology	KeyPAC (125KHz) Proximity technology
Dimensions	Standard: H: 86mm W: 86mm D: 15mm Universal: H: 140mm W: 80mm D: 22mm Vandal: H: 100mm W: 100mm D: 14mm
Maximum Read Range	Up to 200mm (7.87 in.)
Environment	IP66 - Indoor/Outdoor weather resistant
Current	Idle: 85mA Relay Activated: 120mA Lock relay: Single pole change over 2A at 30V max
Voltage	12V DC (nominal), tolerance +10.5V to +20V
Recommended Cable Type	Standard alarm cable
Operating Temperature	-20° to +55° C
Operating Humidity	0 to 90% relative humidity non-condensing
Audiovisual Indication	Red and Green LEDs and audible sounder
Tamper Output	Tamper loop fitted
Specific parts	KeyPAC Solo Vandal Resistant requires a vandal screwdriver or a Yankee 8 bit screw
Certifications	73/23/EEC, ETS 300.300, ETS 300.683


Ordering Information

Part Number	Description
21325	KeyPAC Solo – Standard Black (complete with card wallet)
21326	KeyPAC Solo – Standard Black (complete with token wallet)
21581	KeyPAC Solo – Universal Black (complete with token wallet)
21583	KeyPAC Solo – Universal Black (complete with card wallet)
21585	KeyPAC Solo – Vandal Resistant (complete with token wallet)
21586	KeyPAC Solo – Vandal Resistant (complete with card wallet)


Universal KeyPAC Solo:



Standard KeyPAC Solo:

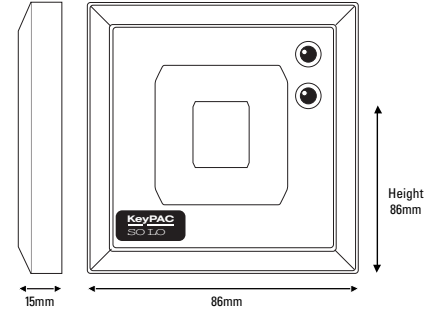


Vandal Resistant KeyPAC Solo:

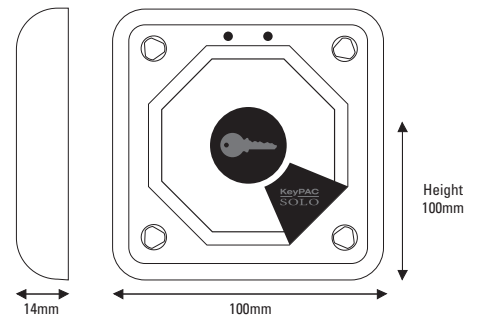

20250 KeyPAC Token



21030 KeyPAC ISO Proximity Card



ACCESSORIES

20019 KeyPAC ID Wallet

- 10 KeyPAC tokens with 10 shadow cards



20018 KeyPAC ID Wallet

- 10 KeyPAC cards with 10 shadow cards



21030/5.00 KeyPAC Master Card

- Available individually as a replacement card

Master Card - How to add/delete cards/keys

Present Master Card to unit three times
Two beeps and yellow LED indicates edit mode
Present cards/keys to unit
Green LED indicates cards/keys added to unit
Red LED indicates cards/keys deleted from unit
Present Master Card to exit

1950 Screwdriver for Vandal Resistant Screws

- For use with 21585 and 21586



STANLEY Security Products

PAC Access Control, 1 Park Gate Close, Bredbury, Stockport, Cheshire, SK6 2SZ
Tel: +44 (0) 161 406 3400 Fax: +44 (0) 161 406 8984 Email: customerservices@stanleysecurityproducts.com
www.stanleysecurityproducts.com

Stanley Security Products is a sales channel of Stanley Security Solutions
Stanley Security Solutions Ltd. Registered in England and Wales No. 181585. Registered Office: Stanley House, Bramble Road, Swindon, Wiltshire SN2 8ER. VAT No. 232 2446 95
All reasonable care has been taken to ensure that the information contained in this publication is accurate as at the date of printing. Such information is nevertheless liable to variation in the event of changes occurring subsequent to the date of printing in the products, services or statements referred to in this publication.