

HS 500



ELMDENE

*Security & Fire
Products*

Benefits:

- Distinctive Hexagonal shape
- Choice of models including economic Contractor model (HS 500C)
- Translucent Polycarbonate Cover
- 'Engineer Friendly' for easy installation and maintenance
- Internal protection against harsh environments for long life
- Low current consumption and operational costs
- Economic multiple installations
- Individual Cover logo can be supplied

Features:


- TRANSLUCENT POLYCARBONATE COVER (3mm)
- ELECTRONICS ENCLOSED IN POLYCARBONATE OR METAL INNER COVER
- POLYCARBONATE OR METAL BACKPLATE
- DUAL PIEZO SOUNDERS
- TWIN LEDs (SELECTABLE)
- SINGLE PIEZO AND LED ON CONTRACTOR MODEL (HS 500C)
- 15 MINUTE CUT-OFF TIMER (SELECTABLE)
- SAB FACILITY WITH ON-BOARD 12V NICAD BATTERY
- ENGINEER MODE FOR SILENT START-UP
- FRONT AND BACK TAMPERS
- OPTIONAL FOAM DETECTION
- SCREEN PRINTING AVAILABLE

*External Sounders
you can rely on*

www.elmdene.co.uk



INTRUDER

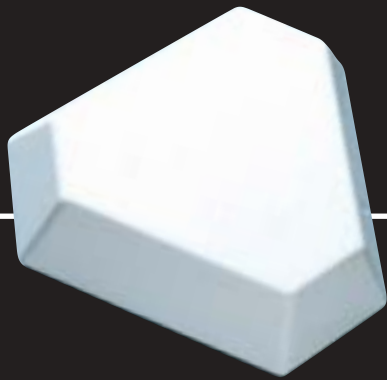

HS 500

Specifications

Materials:

Cover

Polycarbonate (3mm thickness)

Backplate and Inner Cover:

HS 500

Polycarbonate (3mm)

HS 500M

Galvanised Steel (1.2mm)

Strobe:

Input Voltage

12V dc Nominal

Flash Rate

1 per Second

Current Drain

100mA Nominal

Siren:

Model	Input Voltage (V dc Nominal)	Operating Voltage (V)	Twin/Single Piezo	Sound Output (dB at 1m)	Current (mA Nominal)
HS 500C	12	13.8	Single	112	200
HS 500	12	13.8	Twin	118	200
HS 500M	12	13.8	Twin	118	200

Cut-Off Timer

5 sec, 3 min, 10 min, 15 min or No Timer

Trigger Modes

Positive, Negative or Volts-free

Full SAB

12V NiCad Battery

HS 500 and HS 500M:

Selectable LEDs (On, Off or Flashing)

HS 500C:

Single LED

Tamper Return

Positive, Negative or Volts-free


Replaceable Battery

By connecting into terminal block

Engineer Mode

Silent start-up during installation and maintenance

ELMDENE INTERNATIONAL LIMITED
Rodney Road, Fratton, Portsmouth PO4 8SS United Kingdom
Tel: +44 (0)23 9273 9412 Fax: +44 (0)23 9281 1631
e-mail: sales@elmdene.co.uk

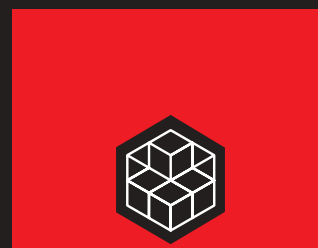

ELMDENE

Security & Fire
Products

www.elmdene.co.uk